




Ming Feng Lighting Co.,Ltd

Address: Bei Yang Street,Zao San Village,Wen Tang,East City,Dongguan,Guangdong Province,China.

Tel: 0086-769-2332-0862 Fax: 0086-769-2332-0862

Email address: mf@mingfeng-lighting.com

LED Tri-proof light



Item No.

MF54-1560

Optical Data

Electrical Data

LED Type	Everlight chip	Power Supply	CE driver
System Efficacy	130lm/W(CCT=5000K)	Input Voltage	100~240VAC/100~277VAC
Luminous Flux	5900lm(CCT=4000K)	Power Frequency	50~60Hz
CCT	3000K/4000K/5000K/6000K	Output Voltage	28.8~48VDC
Beam Angle	120°	Output Current	1.4A(Constant Current)
CRI	Ra80	Power Efficiency	>90%
System Efficiency	>90%	Power Factor	>0.94
		Total Harmonic Distortion	<10%

Others


System Power Consumption	54W	Junction Temperature(Tj)	<65°C(Ta=25°C)
LED Power Consumption	50W	Storage Temperature	-40~+70°C
Fixture Material	ABS Difusor Material Polycarbonate Acid	Operating Temperature	-30~+50°C
Ingress Protection	IP65	Operating Humidity	15~90%RH
Luminaire Net Weight	1.8±0.3kg	Outlook Dimensions	φ1560x120x108mm
Life Span	>80000Hrs(Ta=25°C@L70)	Export Carton Size	1592x243x248mm,4PCS/CTN

Optional Info.


Installation Method	Ceiling/ Hang Mounting						
Fixture Color	Grey						
Intelligent Control	N/A						

Physical Dimensions

Light Distribution Curve

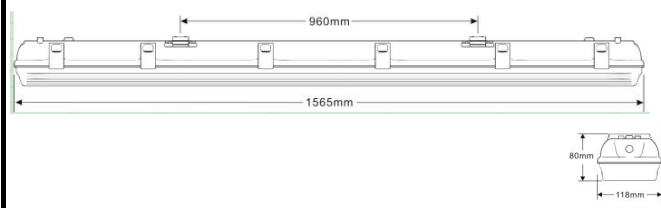

H25201-120° PC Lens



Packing

